

DS-MDT201/4&64/GLE/AI Handheld Scanner



- Support various one-dimensional codes:
EAN/UPC/ISBN13/Codabar/ITF25/ITF14/Matrix25/Code39/Code93/Code128/Code11/MSI/IND25
- Support various QR codes: DM/QR/MicroQR/Aztec
- Support continuous code scanning and single code scanning
- Scanning interval: 10-2000 ms
- Support NFC protocol; Support ISO15693, ISO14443A/B, ISO14443A
- It can quickly identify blurry, distorted and dirty barcodes

▪ Specification


Camera	
Image Sensor	Front camera: 5 MP, Fix-focus Rear camera: 13 MP, Auto-focus
Max. Resolution	1920 × 1080
Flashing Light	Supported
Zoom	4× Digital
Lens	
Focal Length	Front camera: 2.23 mm Rear camera: 3.44 mm
FOV	Front camera: Horizontal FOV: 61.3°, Vertical FOV: 46° Rear camera: Horizontal FOV: 67.9°, Vertical FOV: 53.7°
Aperture	Lens 1: F2.2 Lens 2: F2.2
Video	
Video Compression	H.264, H.265
Video Format	3GP
Audio	
Audio Compression	G.711ulaw, G.711alaw, G.722.1, PCM, AAC-LC
Network and Connection	
Wi-Fi Working Mode	AP,STATION
Screen	
Screen Size	5.5"
Screen Type	IPS; Capacitive touch panel; multi-touch
Resolution	720 × 1440
Storage	
CPU	8cores,2.0GHz
RAM	4 GB
ROM	64GB
Extended Storage	1 TF card (Max. 256 GB)
Wireless Network	
Cellular Network	FDD -LTE: B1/B3/B8 TDD -LTE: B38/B39/B40/B41
Wi-Fi Protocol	802.11 a/b/g/n/ac
Wi-Fi Frequency Band	2.412 to 2.472 GHz, 5.15 to 5.25 GHz, 5.725 to 5.875 GHz
Bluetooth	BT5.0
Positioning Mode	GPS
NFC	Working Frequency: 13.56 MHz Protocol Standard: ISO14443A/B, ISO15693, NFC-IP1, NFC-IP2, etc. Label Standard: M1 card (S50, S70), CPU card, NFC label, etc.
Interface	
Button	Side Keys Volume+, Volume-, Left Scan Key, Right Scan Key, Power Button, Function Key
SIM Card	Only available for models with /GLE /5G:2 (Nano-SIM)
Charging Interface	Type-C
USB	USB 2.0
Fingerprint Module	Not supported

General	
Operating System	Android 10.0
Dimension	157 mm × 75 mm × 14 mm (6.2" × 3.0" × 0.6")
Weight	240 g (0.5 lb.)
Power	5 VDC, 2.0 A, max. 10 W
Client	MDM
OCR	Supported
Vibration Motor	Supported
MIC	Supported
Speaker	1 Built-in speaker, Max. power consumption: 1 W, Max. sound pressure level: 103dB (10 cm)
Gyroscope	Supported
G-sensor	Supported
Distance Sensor	Supported
Light Sensor	Supported
Drop Specifications	1.5 m
Sealing	IP68
Operating Condition	-10 °C to 55 °C (14 °F to 131 °F). Humidity 95% or less (non-condensing)
Electro Static Discharge (ESD)	± 15 KV air discharge
Battery	
Battery Type	Lithium-ion battery, integral
Capacity	4900 mAh
Charging Time	≤ 4 h
Battery Duration	Standby Time > 500 h
Approval	
RF	EN 300 328 V2.1.1(BT or 2.4G); EN 62311:2008(BT or 2.4G); EN 55032:2015; EN 61000-3-2:2014; EN 61000-3-3:2013; EN 50130-4:2011 +A1:2014);
EMC	CE-EMC: EN 55032: 2015, EN 61000-3-2: 2019, EN 61000-3-3: 2013, EN 50130-4: 2011 +A1: 2014
Safety	CB: IEC 62368-1: 2014+A11, IEC 62368-1: 2018 CE-LVD: EN 62368-1: 2014/A11: 2017, EN IEC 62368-1:2020+A11:2020 CE-LVD: EN 62368-1: 2014/A11: 2017
Environment	CE-RoHS: 2011/65/EU, WEEE: 2012/19/EU, Reach: Regulation (EC) No 1907/2006
Protection	IP68: IEC 60529-2013, MIL STD 810G

▪ Available Model

DS-MDT201/4&64/GLE/AI

▪ **Dimension**

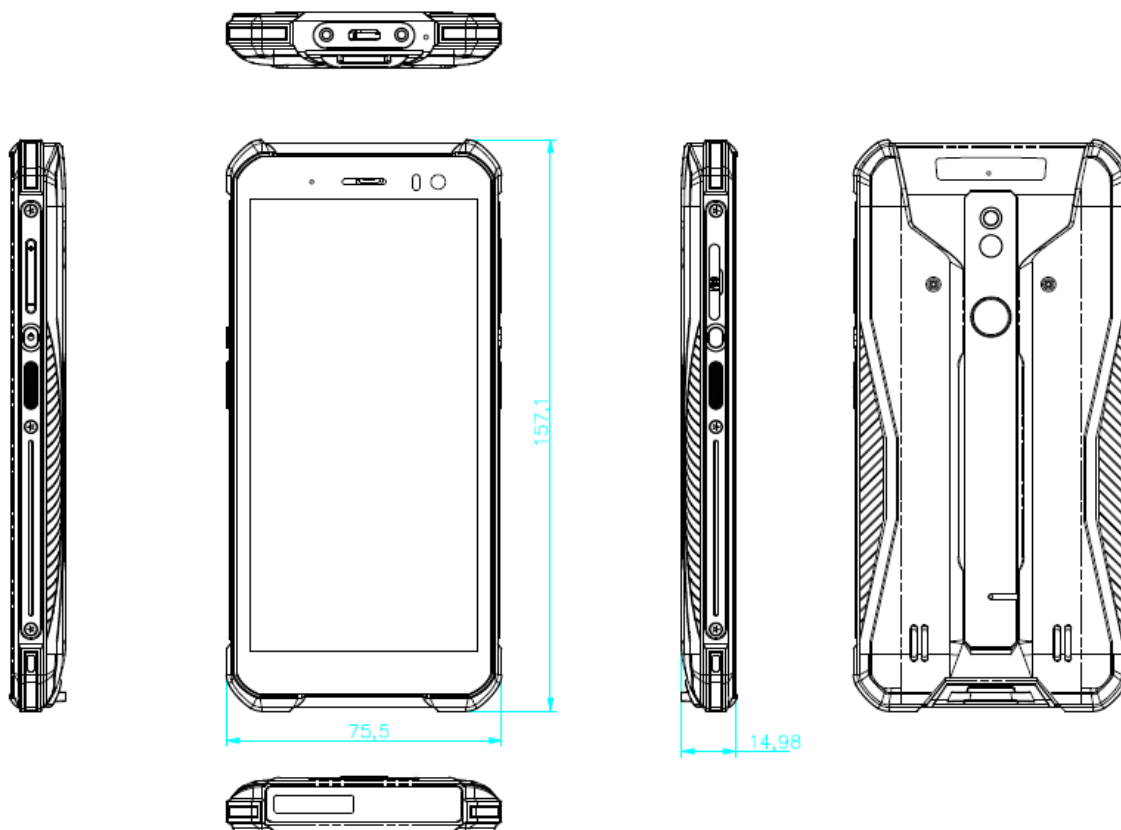

Unit: mm

▪ **Accessory**

▪ **Optional**

DS-MH1620 Scanning Pistol Grip	DS-MH1426-201	DS-MH1421-201
		

*USB cable, AC adapter, Hand strap

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

