

**Application**


The Tension Clamp is used for ADSS is mainly used to connect terminal support, tension support and splice support in setting up ADSS.

**Description**

The tension clamp made of aluminum clad steel or aluminum alloy with firm grit applied and the individual rod assembled into groups to increase the strength of tension clamp in the condition of decreasing the stress imposed on cable.

**Features**

Easy installation and no special tools needed.  
It is compatible with other hardware.  
Right-hand lay direction standard.

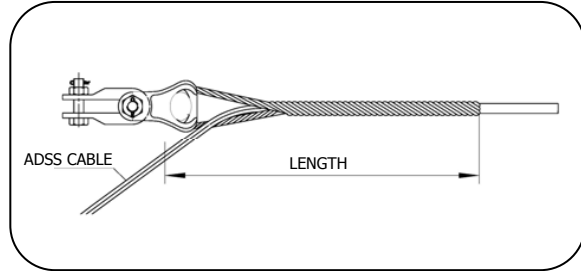

**Catalogue lists**

**Table G2** Helical Dead End Clamp for ADSS short span not more than 150m

Catalog No.	Suitable Dia. (mm)	Length (mm)	Weight (mm)	Color Code
DCC-0800/AD	7.70-8.30	700	0.2	Black
DCC-0910/AD	8.31-8.30	740	0.3	Blue
DCC-0940/AD	8.90-9.90	820	0.3	Orange
DCC-1039/AD	9.91-10.87	820	0.3	Black
DCC-1126/AD	10.88-11.64	860	0.3	Green
DCC-1207/AD	11.65-12.49	900	0.4	Yellow
DCC-1288/AD	12.50-13.26	940	0.4	Red
DCC-1371/AD	13.27-14.15	980	0.5	Black

**Table G3** Helical Dead End Clamp for ADSS Excess short span not more than 80m

Catalog No.	Suitable Dia. (mm)	Length (mm)	Weight (mm)	Color Code
DCC-0825/ADE	7.35-8.25	560	0.1	Red
DCC-0926/ADE	8.26-9.26	600	0.1	Green
DCC-1039/ADE	9.27-10.39	630	0.2	Yellow
DCC-1168/ADE	10.40-11.68	670	0.3	Blue
DCC-1311/ADE	11.69-13.11	730	0.3	Orange

