



CAT5E KEYSTONE JACKS

Part Number: JKS09-SC5E

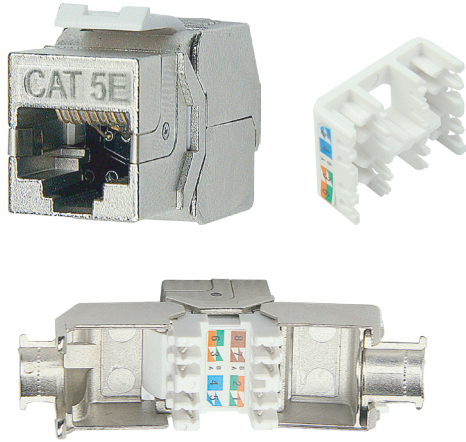

Part Number: JKA09-UC5E

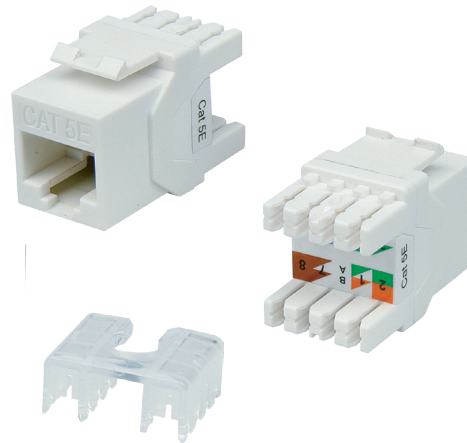

PRODUCT INTRODUCTION

The CAT5E keystone jacks, as the part of Linkbasic CAT5E solutions, exceeds all the requirements of CAT5E standard provides cat5e system performance and user-friendly installation features. It can offer 250MHz bandwidth available.

CONSTRUCTION

| Description | Parameter |
|----------------------------|-----------|
| Contact Resistance(max) | 100mΩ |
| Insulation Resistance(min) | 500MΩ |
| Return Loss(dB) | 5.5dB |



JKB06-UC5E

CAT5E unshielded keystone jack

PRODUCT FEATURES

- Individual design with simple, compacted out looking.
- It complied with the human anthropology. Tool-less design for the shielded keystone jack.
- 110 type impact and punching tool for the unshielded keystone jack
- Special PCB circuit board design can reduce the interference and keep high allowance
- Zinc alloy shielding shell for the shielded keystone jack.
- High tensile PC materials for unshielded keystone jack.
- Available in T568A and T568B
- Contact: phosphor bronze with 6 to 50μgold plate
- 24AWG
- Contact insertion for 1500 times
- The termination protective cap at the back of the module with buckle lock type design, can guarantee the cable to avoid excessive bending after termination, or fall off and the protection of electric shock
- Fully compatible with RJ45 connector, suitable for CAT5E level or lower application

ORDER INFORMATION

| Part Number | Description | Standard Color | Inner box | Carton | Carton measurement (LxWxH) | Carton weight |
|-------------|--------------------------------|----------------|-----------|--------|----------------------------|---------------|
| JKS09-SC5E | CAT5E shielded keystone jack | Silver | 20PCS | 200PCS | 53cm*31cm*23cm | 9.20KG |
| JKA09-UC5E | CAT5E unshielded keystone jack | White | 25PCS | 250PCS | 53cm*31cm*23cm | 3.80KG |
| JKB06-UC5E | CAT5E unshielded keystone jack | White | 25PCS | 250PCS | 53cm*31cm*23cm | 4.20KG |